




SWITCHES FROM WHITE TO AN INTENSE COLOR WHEN EXPOSED TO SUNLIGHT.

This heat transfer vinyl changes color from simple white to an intense color shade when exposed to sunlight. Indoors, it reverses within a few minutes. CAD-CUT® Switch is also ideal for delicate designs, and you can weed it effortlessly.

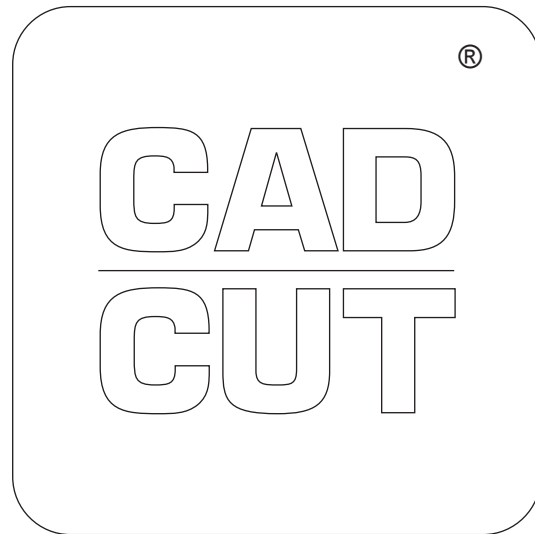

AVAILABLE IN

50 cm x 25 m rolls

RECOMMENDED FABRICS

- 100% Cotton
- 100% Polyester
- Polyester-Cotton blends

* Test before application!

CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1.0 mm for lettering and logos.

APPLICATION INSTRUCTIONS

- Temperature: 150° C
- Time: 10 sec.
- Pressure: Medium (#4-6 on Hotronix®)
- Peel: hot peel

MULTI-COLOR DESIGNS

CAD-CUT® Switch is not recommended for multi-layer applications.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers

CARE INSTRUCTIONS

Machine wash up to 40° C using mild detergent inside out. Do not use bleach. Do not dry-clean. Do not iron directly onto CAD-CUT® Switch (use cover sheet). Do not dry the applied textile in the sun, otherwise the effect of the UV film can diminish or the effect decreases!

STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.

DETAILS



KEY

Easy weed	Thin
Ironable	Sticky carrier
Ironable only inside out	Multi-color application
Washable	Peel hot
Sublimation	Application
Stretchable	Pressure
Flock	



3000
blue



2450
magenta



2800
violet



1100
yellow